


## Rai Bench

Olga Tarrassó, Julià Espinàs. 2018

urbidermis  
SANTA & COLE

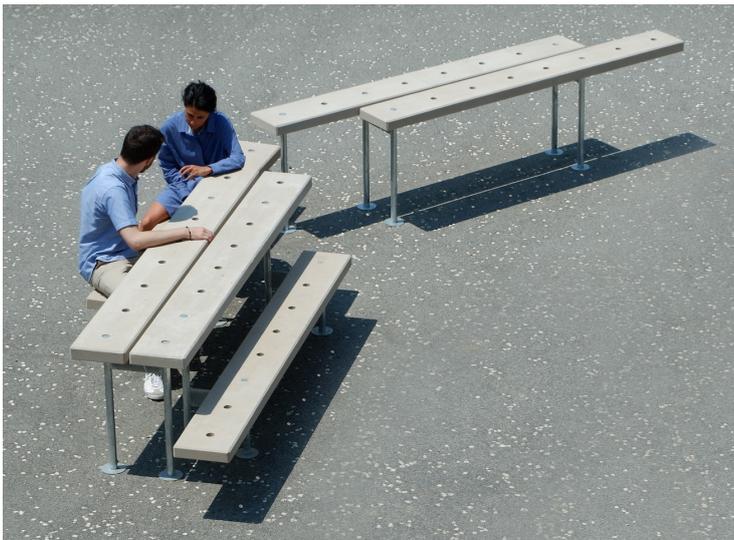

### Materials:

AG3 cast aluminium support legs and anodised extruded aluminium finish. UHPC concrete slats, 2.38 m length with an approximate section of 6x27 cm, mass-coloured with waterproof exposed aggregate finish.

### Finishes:



Anodised AG3

Anodised

UHPC earth

UHPC grey

\*The colors shown are merely indicative and may differ from reality. (Other colors available to order)

\*\*See special finishes for marine environments

### Weights (kg):

Slat: 100.

Low support: 4.5.

High support: 5.9.

Double support: 5.2.

### Installation and maintenance:

Embedded fixation by means of two antirust treated anchor bolts per structure, sunk into holes previously drilled into the pavement and filled with epoxy resin, quick-setting cement or similar; or by means of four stainless steel anchor bolts for surface fixation.

Delivered in two parts: slats and support legs.

Instructions, screws and anchor bolts are included. Surface fixation accessory separately.

No functional maintenance is required.

(For further information log onto [urbidermis.com](http://urbidermis.com))

**Applicable standards:** UNE EN 12727, UNE EN 581, UNE 41510, UNE EN 335.

